

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)


PCT

(10) International Publication Number
WO 2005/034634 A1

- (51) International Patent Classification⁷: **A21C 9/08**, 11/00
- (21) International Application Number:
PCT/US2004/033343
- (22) International Filing Date: 8 October 2004 (08.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/481,497 10 October 2003 (10.10.2003) US
- (71) Applicant (for all designated States except US):
LAWRENCE EQUIPMENT, INC. [US/US]; 2034
North Peck Road, South El Monte, California 91733-3727
(US).
- (72) Inventor; and
- (73) Inventor/Applicant (for US only): **LAWRENCE, Eric,**
C. [US/US]; 2034 North Peck Road, South El Monte, Cal-
ifornia 91733-3727 (US).
- (74) Agents: **ROSE, Robert J.?** et al.; Sheldon & Mak PC, 225
South Lake Avenue, 9th Floor, Pasadena, CA 91101-3021
(US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: DUAL LINE CONVEYOR SYSTEM AND METHOD

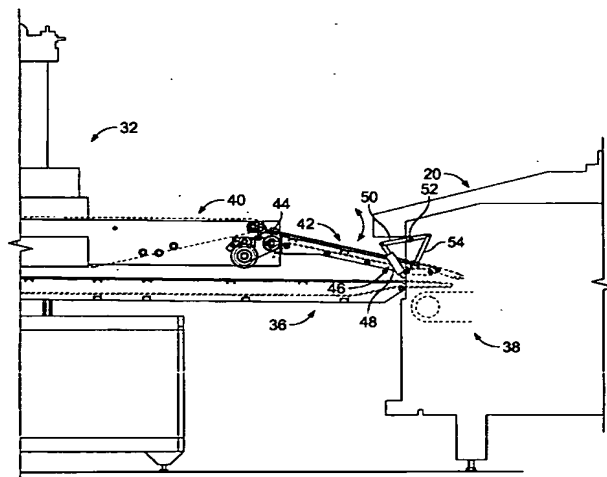

(57) Abstract: An apparatus for combining delivery of objects from a first transport conveyor (34) and a second transport conveyor (40), comprising a first continuous discharge conveyor (36), a second continuous discharge conveyor (42) which is rotatable about a longitudinal axis; means for pivoting the second discharge conveyor about the longitudinal axis between a lower position in which the discharge ends of the first discharge conveyor and the second discharge conveyor are adjacent, and an upper position in which the discharge ends of the first discharge conveyor and the second discharge conveyor are spaced apart sufficiently to accommodate the objects therebetween; and means for synchronizing the pivoting means with discharge of the objects from the first discharge conveyor and the second discharge conveyor.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.